

AHD 1219 F

Panel PCs with Foil Front



- **Panel PCs with foil front**
- **All in one solution for quick installation – saves space and costs**
- **Powerful PC system for enhanced performance**
- **Can also be integrated into existing systems**
- **Completely redeveloped**

Bönig Automationstechnologie's new generation of displays expands its product range in the display category with innovative devices.

Combining increased performance and functionality in a valuable modern design, they increase operational safety and ease of operation on ship bridges. Their luminosity of up to 1000 cd/m² ensures good readability at all times, even during bright sunlight. Automatic dimming further ensures that the displays operate without glare especially when cruising at night.

Automotive components allow the displays to be used in greater temperature ranges than previous displays.

Their 24 V DC power supply makes these devices especially suitable for use on ships.

The latest display technology provides even more brilliant colors and a markedly increased view angle.


Basic functions such as alarm acknowledgement and brightness control can be quickly accessed with the built-in buttons.

The powerful Panel PCs allow safe and reliable operation, even in extreme conditions.

The visualization system with embedded operating system operates completely autonomously. Advantage: it requires neither firewalls nor virus scanners, and in addition, the configuration cannot be changed by accident.

These PCs were especially developed for maritime use. The absence of moveable parts, such as hard disks, makes the device insensitive to shock and thus ideally suited for use on ships. The passive cooling system significantly contributes to its operational safety. The device is optionally available with DVI and VGA interfaces for displaying for example electronic sea charts.

Dimensions

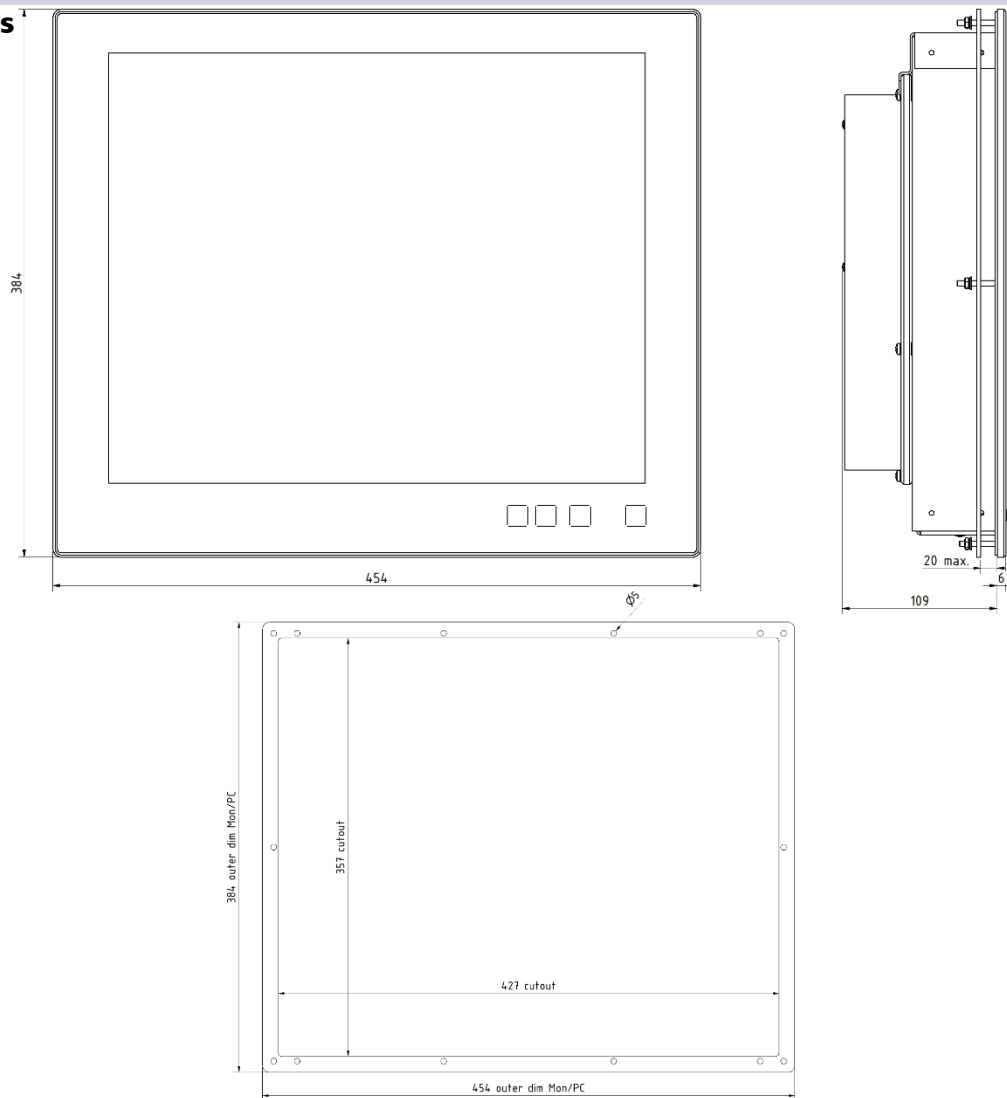

Technical Data

Power supply	24 V DC (+30% / -25%)	Interfaces	7 x CAN (6 x system integration, 1 x remote control)
Power consumption	Ca. 60 W (24 V DC)		1 x RS 232 (for example for GPS)
Ambient temperature	-30°C...+45°C (active cooling of the mounting space recommended for high interior console temperatures)		1 x LAN
Storage Temperature	-50°C...+85°C		2 x USB (for example for a mouse)
Weight	Ca. 12 kg		1 x Video (50 Hz, PAL, BNC)
Protection class	IP 56 (front side), IP 22 (rear side)		2 x DVI IN (Optional)
Dimensions	454 x 384 x 115		1 x VGA (Optional)
W x H x D (mm)	Installation depth min. 140 mm		Digital IN (4 x optocoupler)
Panel cutout (mm)	427 x 357		Digital OUT (5 x relay)
Processor	2.0 GHz Quad Core	Resolution	1280 x 1024 pixels (H x V; max., SXGA)
RAM	8 GB	Luminosity	1000 cd/m ²
Flash disk	128 GB	Contrast	2000:1
Approvals	ABS, CRS, DNV, LR, RINA	Viewing angle	Horizontal -89° / +89° vertical -89° / +89°
		Required distance to compass	Steering magnetic compass: 1.00 m Standard magnetic compass: 1.80 m
		Item number	20212 16358 (With DVI and VGA)